



**ZASTAVA
KAMIONI**



New Turbo Rival 4x4








ZASTAVA KAMIONI

ZASTAVA KAMIONI d.o.o, Kragujevac
- u restrukturiranju
Kosovska 4 · 34000 Kragujevac · Republika Srbija
tel: ++381 34 336 160 · fax: ++381 34 335 319
e-mail: prodaja@zastava-kamioni.co.rs
www.zastava-kamioni.co.rs



New TurboRival 4x4

ENGINE TYPE	EURO 3	SOFIM 8140.43S - Diesel, four strokes with direct fuel injection, (COMMON RAIL)
DISPLACEMENT (cm ³)		2800
MAXIMUM POWER AT 3600 RPM		92 kW / 125 HP
MAXIMUM TORQUE AT 1800 RPM		290 Nm
COOLING TYPE		Water
CLUTCH		Dry with a single disc and 10 1/2" mechanical control
GEARBOX		IVECO 2826.5 Mechanical with 5 synchronized gears for forward movement and reverse
BREAKS		Hydraulic servo with ABS, and independent circulation, disk in front, drums in the rear
STEERING WHEEL		Hidraulic with servo action

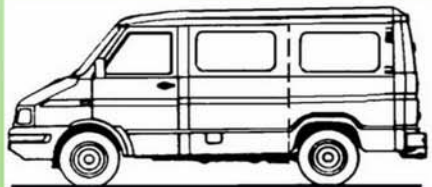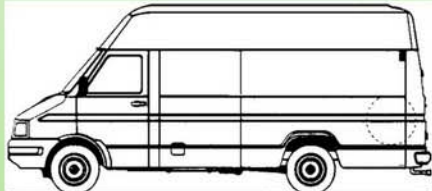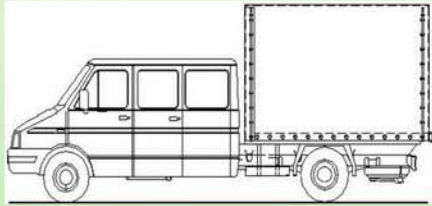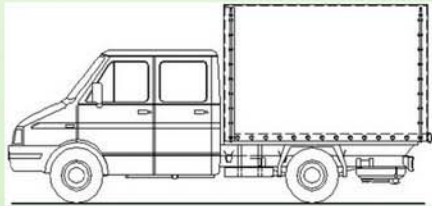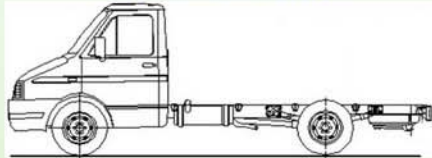

Technical Specification	CHASSIS CAB		CHASSIS CAB (6+1)		CHASSIS CAB (8+1)		TRUCK		CREW CAB				DELIVERY VAN		LIFTED ROOF VAN		VAN 8+1
	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H
models	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H
TYRES	215/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16
WHEELBASE (mm)	3310		3310		3310		3310		3310		3310		2800 3310 3310		2800 3310 3310		2800
VEHICLE LENGTH (mm)	5740		5740		5740		5780		5915		5980		4815 5965 5965		4815 5965 5965		4815
VEHICLE WIDTH (mm)	2000		2000		2000		2140		2140		2140		2000		2000		2000
VEHICLE HEIGHT (mm)	2200		2200		2200		2200		2200		2200		2460		2820		2380
INTERIOR LOADING BED / AREA LENGTH (mm)							3493		2801		2140		2463 3613 3613		2463 3613 3613		
INTERIOR LOADING BED / AREA WIDTH (mm)							2073		2073		2073		1820		1820		
INTERIOR LOADING BED / AREA HEIGHT (mm)							400		400		400		1512		1885		
LOADING AREA VOLUME (m³)													6,7 9,9		8,4 12,4		
CLEARANCE (mm)	850		850		850		1100		1100		1100		790		790		790
PAYLOAD (kg)	1480	2090	1290	1960	1160	1830	1240	1910	1110	1780	1020	1720	1200 1130	1800	1220 1150	1820	8 putnika +380
GVW (kg)	3500	4200	3500	4200	3500	4200	3500	4200	3500	4200	3500	4200	3500	4200	3500	4200	3500
MAXIMUM SPEED (km/h)	102		102		102		102		102		102		102		102		102
FUEL TANK CAPACITY (l)	70		70		70		70		70		70		70		70		70
SURMOUNTING MAXIMUM RISE (%)	45		45		45		45		45		45		45		45		45

ACCORDING TO PROGRESS POLICY OF PRODUCTS ZASTAVA KAMIONI CAN CHANGE TECHNICAL CHARACTERISTICS OF PRODUCTS WITHOUT PREVIOUS ANNOUNCEMENT